

M1系列技术参数

规格型号	10K1-M1	20K1-M1	30K1-M1	40K1-M1	50K1-M1	60K1-M1	70K1-M1	80K1-M1	90K1-M1	100K1-M1
额定电压	220V	220V	220V	220V	220V	220V	220V	220V	220V	220V
额定功率	1000W	2000W	3000W	4000W	5000W	6000W	7000W	8000W	9000W	10000W
额定电流	4.5A	9.0A	13.5A	18.0A	22.5A	27.0A	31.5A	36.0A	40.5A	45.0A

△ 270 (LUV) 系统性能提升


输出

输出




额定功率	1000W	2000W	3000W	4000W	5000W	6000W	7000W	8000W	9000W	10000W
额定电压	220V	220V	220V	220V	220V	220V	220V	220V	220V	220V
额定电流	4.5A	9.0A	13.5A	18.0A	22.5A	27.0A	31.5A	36.0A	40.5A	45.0A
额定功率因数	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
额定效率	92%	92%	92%	92%	92%	92%	92%	92%	92%	92%
额定寿命	100000h	100000h	100000h	100000h	100000h	100000h	100000h	100000h	100000h	100000h
额定温度	40℃	40℃	40℃	40℃	40℃	40℃	40℃	40℃	40℃	40℃
额定湿度	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%
额定海拔	1000m	1000m	1000m	1000m	1000m	1000m	1000m	1000m	1000m	1000m
额定振动	10m/s²	10m/s²	10m/s²	10m/s²	10m/s²	10m/s²	10m/s²	10m/s²	10m/s²	10m/s²
额定冲击	1500m/s²	1500m/s²	1500m/s²	1500m/s²	1500m/s²	1500m/s²	1500m/s²	1500m/s²	1500m/s²	1500m/s²

© 2023 Chuan Dian. All rights reserved.

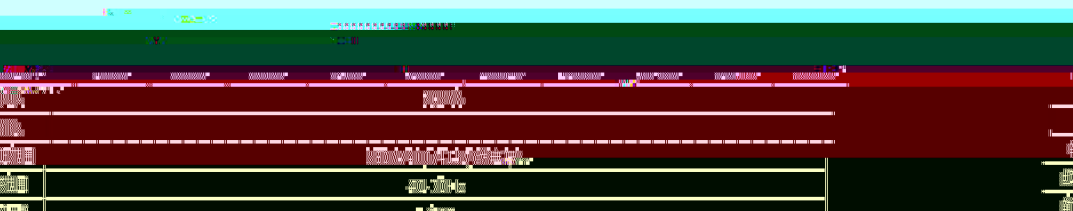

1. 道路能力	110%，可持續1小時； 125%，可持續10分鐘； 150%，可持續1分鐘
2. 道路峰值比	3:1
3. 旁路	
4. 旁路電壓	3.0V/4.0V/5.0V/6.0V/7.0V

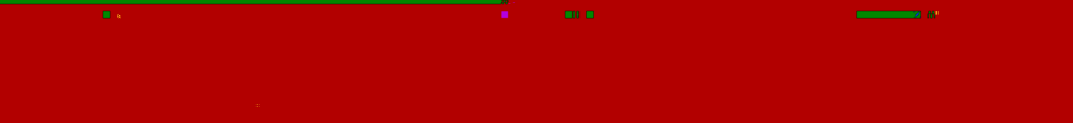

1. 道路能力	110%，可持續1小時； 125%，可持續10分鐘； 150%，可持續1分鐘
2. 道路峰值比	3:1
3. 旁路	
4. 旁路電壓	3.0V/4.0V/5.0V/6.0V/7.0V

